


Steg 1

Skru på antennen og plugg i strømkabelen.

Koble deg til wifi nettet som heter dragino-xxxxx. Passord: dragino+dragino


Obs! Antennen må være montert før man setter strøm på, ellers kan gatewayen bli ødelagt.

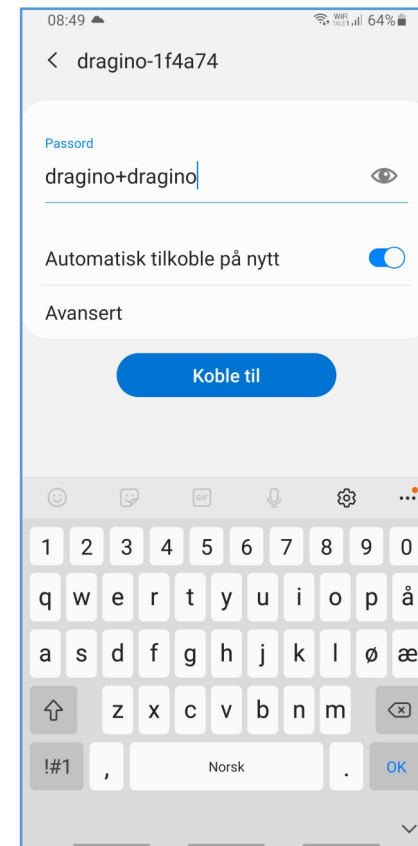

Steg 2

Åpne nettleseren din (chrome, edge e.l.) og tast inn 10.130.1.1


Logg deg på med brukernavn: root og passord: dragino

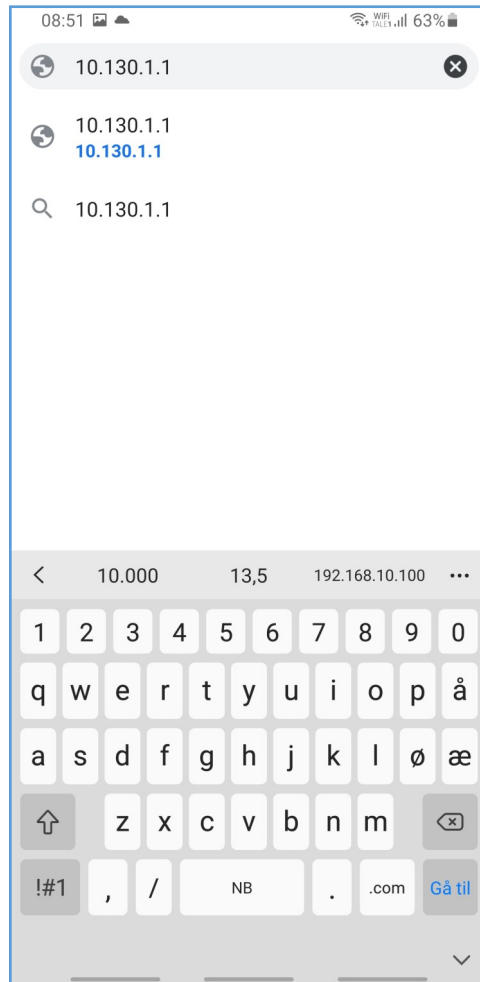

Steg 5

Når du er ferdig naviger til home via samme meny som til wifi, og se om WiFi og LoRaWAN får grønne haker, det kan ta et par minutter.

Husk å logge deg av WiFi nettverket til gatewayen og tilbake til ditt eget når du er ferdig.

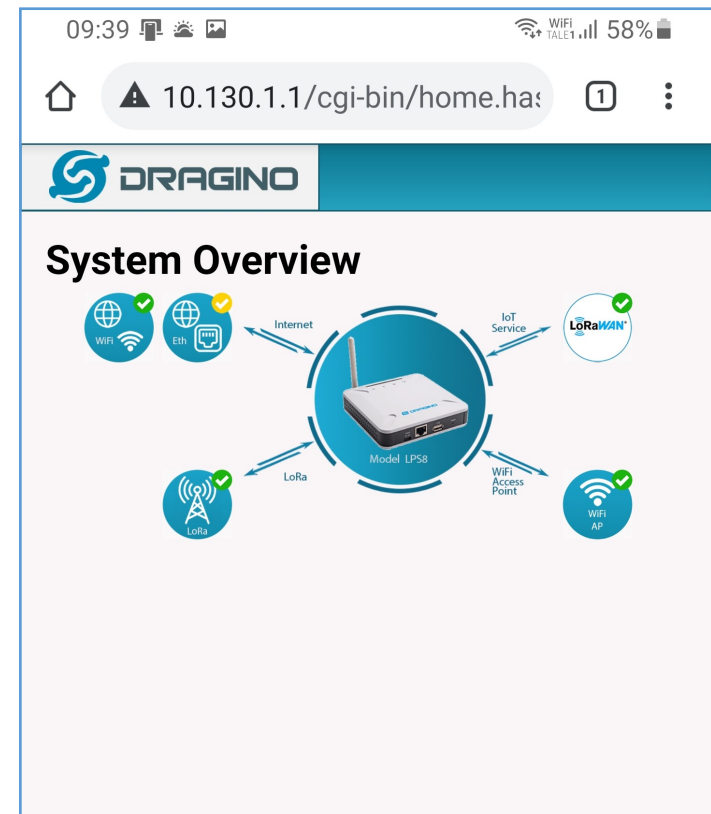

Steg 4

-Hak av på Enable WiFi WAN Client.

-I WiFi Survey kan du velge nettverket ditt.

-Skriv så inn Wifi passordet ditt i Passphrase boksen.

-Trykk på Save&Apply.

The screenshot shows the Dragino web interface for configuring WiFi settings. The page title is "WiFi". Under "Radio Settings", the Channel is set to 1 and Tx Power is 17 dBm. Under "WiFi Access Point Settings", "Enable WiFi Access Point" is checked, the SSID is "dragino-1f4a74", and encryption is WPA2. Under "WiFi WAN Client Settings", "Enable WiFi WAN Client" is checked, the Host WiFi SSID is "F-Tech", and the WiFi Survey is set to "Choose WiFi SSID...". The WiFi status is "OK". Buttons for "Save&Apply", "Cancel", and "Refresh" are at the bottom.

Steg 3

Naviger til wifi innstillingene ved å trykke på de tre strekene øverst til høyre, så Network > WiFi.

